


HYDRAULIC SHEAR RHS100



- MADE IN ITALY <
- GREAT VERSATILITY <
- EXCELLENT FOR PRIMARY & SECONDARY DEMOLITION <
- HARDOX WEAR-RESISTANT PARTS <
- INTERCHANGEABLE BLADES <
- 360° HYDRAULIC ROTATION <

MATCH IT WITH

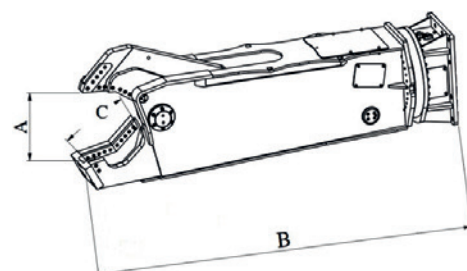

DATA SHEET

	EU	USA
Excavator weight (arm position)	70 - 90 t	70 - 90 t
Excavator weight (bucket position)	90 - 120 t	90 - 120 t
Equipment weight	9950 kg	21936 lb
Opening A	900 mm	35 inch
Length B	5000 mm	197 inch
Depth C	900 mm	35 inch
Maximum oil pressure	340 bar	4931 psi
Required oil supply	500 - 700 L/min	132 - 185 gal/min
Rotation oil pressure	120 - 130 bar	1740 - 1885 psi
Rotation oil flow	70 - 80 L/min	18 - 21 gal/min

www.ramtec.it | info@ramtec.it |  +39 3499813724 | +39 0803388199



Data and pictures are not binding. The manufacturer can improve attachments without notice.