

HYDRAULIC SHEAR RHS12




IT



- MADE IN ITALY <
- GREAT VERSATILITY <
- EXCELLENT FOR PRIMARY & SECONDARY DEMOLITION <
- HARDOX WEAR-RESISTANT PARTS <
- INTERCHANGEABLE BLADES <
- 360° HYDRAULIC ROTATION <

MATCH IT WITH

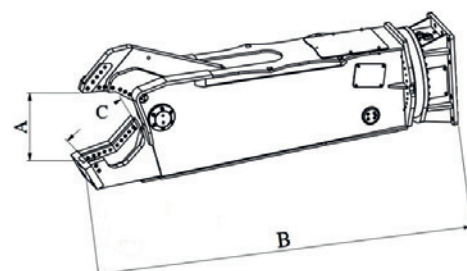

DATA SHEET

	EU	USA
Excavator weight (arm position)	7 - 10 t	7 - 10 t
Excavator weight (bucket position)	12 - 19 t	12 - 19 t
Equipment weight	1250 kg	2756 lb
Opening A	440 mm	17 inch
Length B	2450 mm	96 inch
Depth C	400 mm	16 inch
Maximum oil pressure	310 bar	4496 psi
Required oil supply	120 - 160 L/min	31 - 42 gal/min
Rotation oil pressure	120 - 130 bar	1740 - 1885 psi
Rotation oil flow	20 - 30 L/min	5 - 8 gal/min