



# HYDRAULIC SHEAR RHS120



- MADE IN ITALY <
- GREAT VERSATILITY <
- EXCELLENT FOR PRIMARY & SECONDARY DEMOLITION <
- HARDOX WEAR-RESISTANT PARTS <
- INTERCHANGEABLE BLADES <
- 360° HYDRAULIC ROTATION <

MATCH IT WITH

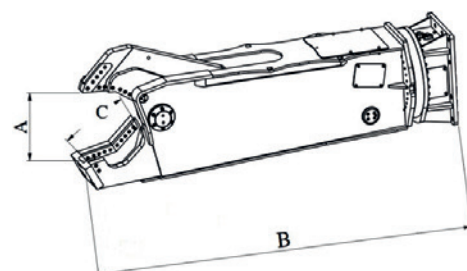

## DATA SHEET

	EU	USA
<b>Excavator weight</b> (arm position)	90 - 110 t	90 - 110 t
<b>Excavator weight</b> (bucket position)	100 - 130 t	100 - 130 t
<b>Equipment weight</b>	11500 kg	25353 lb
<b>Opening A</b>	950 mm	37 inch
<b>Length B</b>	5300 mm	209 inch
<b>Depth C</b>	950 mm	37 inch
<b>Maximum oil pressure</b>	340 bar	4931 psi
<b>Required oil supply</b>	700 - 900 L/min	185 - 238 gal/min
<b>Rotation oil pressure</b>	120 - 130 bar	1740 - 1885 psi
<b>Rotation oil flow</b>	70 - 80 L/min	18 - 21 gal/min

www.ramtec.it | info@ramtec.it |  +39 3499813724 | +39 0803388199



Data and pictures are not binding. The manufacturer can improve attachments without notice.