

HYDRAULIC SHEAR RHS20



IT



MADE IN ITALY <

GREAT VERSATILITY <


EXCELLENT FOR PRIMARY & SECONDARY DEMOLITION <

HARDOX WEAR-RESISTANT PARTS <

INTERCHANGEABLE BLADES <

360° HYDRAULIC ROTATION <

MATCH IT WITH

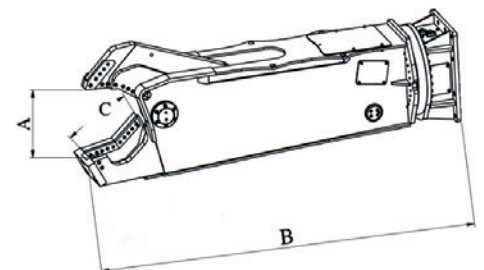

DATA SHEET

	EU	USA
Excavator weight (arm position)	14 - 18 t	14 - 18 t
Excavator weight (bucket position)	20 - 28 t	20 - 28 t
Equipment weight	2030 kg	4475 lb
Opening A	530 mm	21 inch
Length B	2785 mm	110 inch
Depth C	500 mm	20 inch
Maximum oil pressure	340 bar	4931 psi
Required oil supply	200 - 220 L/min	53 - 58 gal/min
Rotation oil pressure	120 - 130 bar	1740 - 1885 psi
Rotation oil flow	20 - 30 L/min	5 - 8 gal/min

www.ramtec.it | info@ramtec.it |  +39 3499813724 | +39 0803388199



Data and pictures are not binding. The manufacturer can improve attachments without notice.