

HYDRAULIC SHEAR

RHS45

IT



EXCELLENT FOR PRIMARY & SECONDARY DEMOLITION

HARDOX WEAR-RESISTANT PARTS


INTERCHANGEABLE BLADES

360° HYDRAULIC ROTATION

MADE IN ITALY

GREAT VERSATILITY

MATCH IT WITH

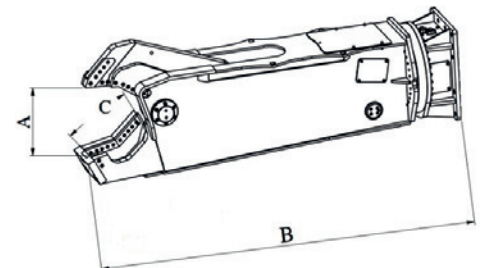

DATA SHEET

	EU	USA
Excavator weight (arm position)	28 - 35 t	28 - 35 t
Excavator weight (bucket position)	45 - 60 t	45 - 60 t
Equipment weight	4500 kg	9921 lb
Opening A	700 mm	28 inch
Length B	3361 mm	132 inch
Depth C	690 mm	27 inch
Maximum oil pressure	340 bar	4931 psi
Required oil supply	300 - 350 L/min	79 - 92 gal/min
Rotation oil pressure	120 - 130 bar	1740 - 1885 psi
Rotation oil flow	50 - 60 L/min	13 - 16 gal/min

www.ramtec.it | info@ramtec.it |  +39 3499813724 | +39 0803388199



Data and pictures are not binding. The manufacturer can improve attachments without notice.