

# HYDRAULIC SHEAR

## RHS55

IT



EXCELLENT FOR PRIMARY & SECONDARY DEMOLITION

HARDOX WEAR-RESISTANT PARTS


INTERCHANGEABLE BLADES

360° HYDRAULIC ROTATION

MADE IN ITALY

GREAT VERSATILITY

MATCH IT WITH

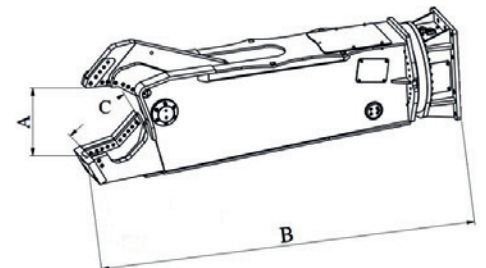

### DATA SHEET

	EU	USA
<b>Excavator weight</b> (arm position)	30 - 45 t	30 - 45 t
<b>Excavator weight</b> (bucket position)	50 - 70 t	50 - 70 t
<b>Equipment weight</b>	5630 kg	12412 lb
<b>Opening A</b>	800 mm	31 inch
<b>Length B</b>	4100 mm	161 inch
<b>Depth C</b>	690 mm	27 inch
<b>Maximum oil pressure</b>	340 bar	4931 psi
<b>Required oil supply</b>	350 - 400 L/min	92 - 106 gal/min
<b>Rotation oil pressure</b>	120 - 130 bar	1740 - 1885 psi
<b>Rotation oil flow</b>	50 - 60 L/min	13 - 16 gal/min

www.ramtec.it | info@ramtec.it |  +39 3499813724 | +39 0803388199



Data and pictures are not binding. The manufacturer can improve attachments without notice.