

# HYDRAULIC SHEAR RHS6




IT



- MADE IN ITALY <
- GREAT VERSATILITY <
- EXCELLENT FOR PRIMARY & SECONDARY DEMOLITION <
- HARDOX WEAR-RESISTANT PARTS <
- INTERCHANGEABLE BLADES <
- 360° HYDRAULIC ROTATION <

## MATCH IT WITH

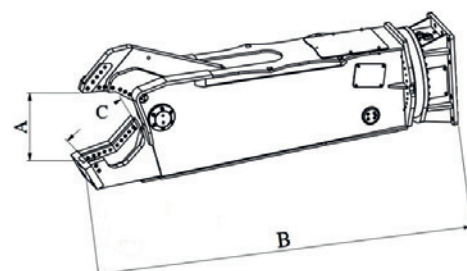

## DATA SHEET

	EU	USA
<b>Excavator weight</b> (arm position)	4 - 7 t	4 - 7 t
<b>Excavator weight</b> (bucket position)	7 - 12 t	7 - 12 t
<b>Equipment weight</b>	640 kg	1411 lb
<b>Opening A</b>	365 mm	14 inch
<b>Length B</b>	1880 mm	74 inch
<b>Depth C</b>	240 mm	9 inch
<b>Maximum oil pressure</b>	250 bar	3626 psi
<b>Required oil supply</b>	80 - 100 L/min	21 - 26 gal/min
<b>Rotation oil pressure</b>	60 bar	870 psi
<b>Rotation oil flow</b>	20 L/min	5 gal/min