


HYDRAULIC SHEAR RHS70




IT



- MADE IN ITALY <
- GREAT VERSATILITY <
- EXCELLENT FOR PRIMARY & SECONDARY DEMOLITION <
- HARDOX WEAR-RESISTANT PARTS <
- INTERCHANGEABLE BLADES <
- 360° HYDRAULIC ROTATION <

MATCH IT WITH

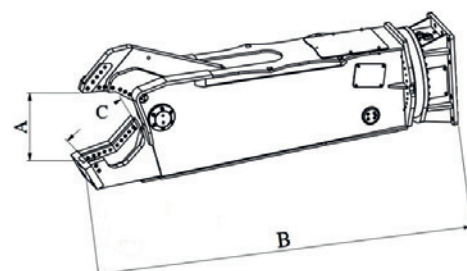

DATA SHEET

	EU	USA
Excavator weight (arm position)	45 - 60 t	45 - 60 t
Excavator weight (bucket position)	70 - 100 t	70 - 100 t
Equipment weight	6900 kg	15212 lb
Opening A	850 mm	33 inch
Length B	4700 mm	185 inch
Depth C	800 mm	31 inch
Maximum oil pressure	340 bar	4931 psi
Required oil supply	380 - 430 L/min	100 - 113 gal/min
Rotation oil pressure	120 - 130 bar	1740 - 1885 psi
Rotation oil flow	50 - 60 L/min	13 - 16 gal/min

www.ramtec.it | info@ramtec.it |  +39 3499813724 | +39 0803388199



Data and pictures are not binding. The manufacturer can improve attachments without notice.