

HYDRAULIC SHEAR

RHS80



IT



EXCELLENT FOR PRIMARY & SECONDARY DEMOLITION

HARDOX WEAR-RESISTANT PARTS


INTERCHANGEABLE BLADES

360° HYDRAULIC ROTATION

MADE IN ITALY

GREAT VERSATILITY

MATCH IT WITH

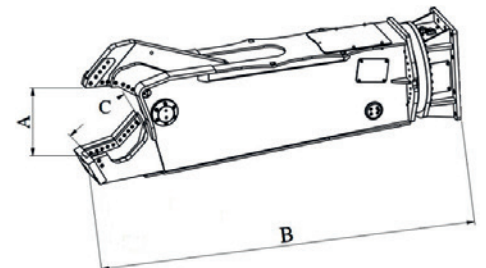

DATA SHEET

	EU	USA
Excavator weight (arm position)	50 - 70 t	50 - 70 t
Excavator weight (bucket position)	80 - 110 t	80 - 110 t
Equipment weight	7800 kg	17196 lb
Opening A	870 mm	35 inch
Length B	4170 mm	164 inch
Depth C	830 mm	33 inch
Maximum oil pressure	340 bar	4931 psi
Required oil supply	400 - 500 L/min	106 - 132 gal/min
Rotation oil pressure	120 - 130 bar	1740 - 1885 psi
Rotation oil flow	70 - 80 L/min	18 - 21 gal/min

www.ramtec.it | info@ramtec.it |  +39 3499813724 | +39 0803388199



Data and pictures are not binding. The manufacturer can improve attachments without notice.