

ROTATING PULVERIZER RRP16



IT



MADE IN ITALY <


GREAT VERSATILITY <

EXCELLENT FOR PRIMARY & SECONDARY DEMOLITION <

HARDOX WEAR-RESISTANT PARTS <

INTERCHANGEABLE TEETH & BLADES <

360° HYDRAULIC ROTATION <

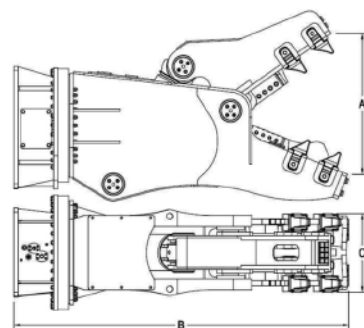

MATCH IT WITH



DATA SHEET

Excavator weight

Equipment weight

Opening A

Length B

Width C

Maximum oil pressure

Required oil supply

Rotation oil pressure

Rotation oil flow

EU

15 - 20 t

1710 kg

790 mm

2120 mm

500 mm

340 bar

150 - 220 L/min

120 - 130 bar

20 - 30 L/min

USA

15 - 20 t

3769 lb

31 inch

83,5 inch

19,7 inch

4931 psi

39 - 58 gal/min

1740 - 1885 psi

5 - 8 gal/min

www.ramtec.it | info@ramtec.it |  +39 3499813724 | +39 0803388199



Data and pictures are not binding. The manufacturer can improve attachments without notice.