

ROTATING PULVERIZER RRP60



IT



MADE IN ITALY <

GREAT VERSATILITY <


EXCELLENT FOR PRIMARY & SECONDARY DEMOLITION <

HARDOX WEAR-RESISTANT PARTS <

INTERCHANGEABLE TEETH & BLADES <

360° HYDRAULIC ROTATION <

MATCH IT WITH

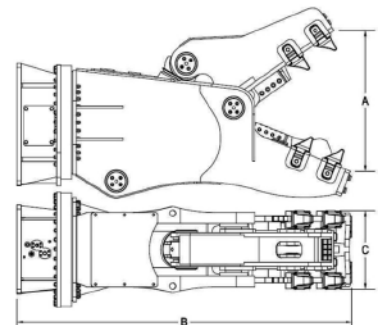

DATA SHEET

Excavator weight

Equipment weight

Opening A

Length B

Width C

Maximum oil pressure

Required oil supply

Rotation oil pressure

Rotation oil flow

EU

50 - 80 t
6000 kg
1280 mm
3230 mm
660 mm
340 bar
330 - 400 L/min
120 - 130 bar
50 - 60 L/min

USA

50 - 80 t
13228 lb
50 inch
127 inch
25,98 inch
4931 psi
87 - 105 gal/min
1740 - 1885 psi
13 - 16 gal/min

www.ramtec.it | info@ramtec.it |  +39 3499813724 | +39 0803388199



Data and pictures are not binding. The manufacturer can improve attachments without notice.