

# RDG25



MADE IN ITALY <

GREAT VERSATILITY <


EXCELLENT FOR DEMOLITION & HANDLING <

HARDOX WEAR-RESISTANT PARTS <

INTERCHANGEABLE BLADES <

360° HYDRAULIC ROTATION <

## MATCH IT WITH

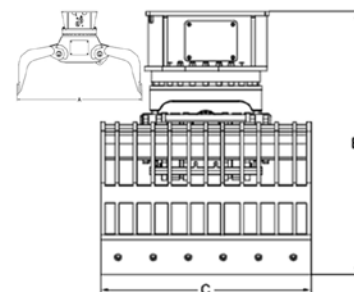

## DATA SHEET

	EU	USA
<b>Excavator weight</b>	30 - 50 t	30 - 50 t
<b>Equipment weight</b>	2250 kg	4960 lb
<b>Opening A</b>	2430 mm	96 inch
<b>Height B</b>	1581 mm	62 inch
<b>Width C</b>	1400 mm	55 inch
<b>Maximum oil pressure</b>	300 bar	4351 psi
<b>Required oil supply</b>	80 - 120 L/min	21 - 31 gal/min
<b>Rotation oil pressure</b>	120 - 130 bar	1740 - 1885 psi
<b>Rotation oil flow</b>	50 - 60 L/min	13 - 16 gal/min